


**BL compact™ fieldbus station for DeviceNet™**

**2 Analog Inputs for Current or Voltage and 2 Analog Outputs for Voltage**

**BLCDN-4M12S-2AI2AO-VI**

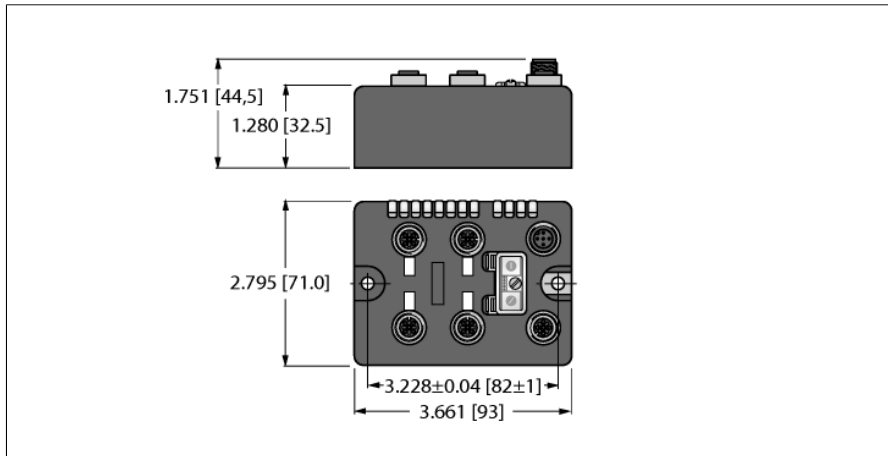

- On-machine Compact fieldbus I/O block
- DeviceNet™ slave
- 125 / 250 / 500 kbps
- Two 5-pole M12 connectors for fieldbus connection
- 2 rotary switches for node address
- IP67, IP69K
- M12 I/O connectors
- LEDs indicating status and diagnostics
- Electronics galvanically separated from the field level via optocouplers
- 2 analog inputs for current or voltage
- 0/4...20 mA or -10/0...+10 VDC (selectable per channel)
- 2 analog voltage outputs
- -10/0...+10 VDC

<b>Type designation</b>	BLCDN-4M12S-2AI2AO-VI
Ident-No.	6811058
<b>Nominal system voltage</b>	24 VDC
System power supply	Via DeviceNet
Admissible range V+	11...30VDC
Nominal current V+	130 mA
Max. current V+	4 A
<b>Fieldbus transmission rate</b>	125/250/500 kbps
Adjustment transmission rate	Automatic detection
Fieldbus address range	0...63
	64...80 (programmable MACID)
	81...99 (manufacturer specific)
Fieldbus addressing	2 decimally coded rotary switches
Fieldbus connection technology	2 × M12
	5-pole
Fieldbus termination	external
Service interface	RS232 interface
Vendor ID	48
Product type	12
Product code	11058
<b>Analog inputs</b>	from 2AI2AO-VI
Operating modes	0/4 ... 20 mA or -10/0 ... 10 VDC
Type of input diagnostics	Channel diagnostics
Sensor supply	24 VDC, 1 amp max.
Input resistance	Current: < 0.065 KΩ, Voltage: < 225 KΩ
Maximum limiting frequency analog	< 20 Hz
Basic fault limit at 23 °C	< 0.3 %
Repeatability	< 0.05 %
Temperature coefficient	< 300 ppm / °C of full scale
Resolution	16 bit
Measuring principle	Sigma Delta
Measurement display	16 bit signed integer 12 bit full range left-justified
<b>Analog outputs</b>	from 2AI2AO-VI
Operating modes	-10/0 ... 10 V
Type of output diagnostics	Channel diagnostics
Sensor supply	24 VDC, 250 mA per channel
Load resistance, resistive	> 1 kΩ
Load resistance, capacitive	< 1 μF
Transmission frequency	< 100 Hz
Basic fault limit at 23 °C	< 0.3 %
Repeat accuracy	< 0.05 %
Temperature coefficient	< 300 ppm/°C of full scale
Resolution	16 bit
Measured-value display	16 bit signed integer 12 bit full range left-justified


**BL compact™ fieldbus station for DeviceNet™**  
**2 Analog Inputs for Current or Voltage and 2 Analog Outputs for Voltage**  
**BLCDN-4M12S-2AI2AO-VI**

---

<b>Dimensions</b>	93 x 71 x 32.5 mm
Mounting	2 × 5.4 mm diameter holes, 1.7 Nm torque
Weight	320 ± 20 g
Housing material	Glass-filled nylon, nickel plated brass connectors
Housing color	Black
Window material	Lexan
Material screw	Nickel-plated brass
Material label	Polyester with polycarbonate overlay
Ground label material	Nickel plated brass
Protection class	IP67 IP69K
Operating temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Relative humidity	15 to 95% (non-condensing)
Vibration test	according to IEC 61131-2
Extended vibration resistance - up to 20 g (at 10 up to 150 Hz)	For mounting on base plate or machinery
Shock test	according to IEC 61131-2
Electromagnetic compatibility	according to IEC 61131-2
Approvals and certificates	CE, cULus



**BL compact™ fieldbus station for DeviceNet™**  
**2 Analog Inputs for Current or Voltage and 2 Analog Outputs for Voltage**  
**BLCDN-4M12S-2AI2AO-VI**

**Pinning and wiring diagram**

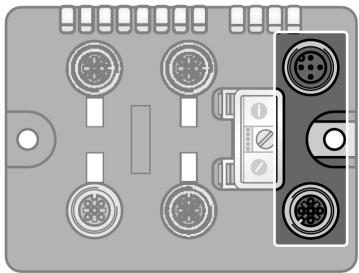


**DeviceNet™**  
Fieldbus cable (example): RSC RKC 572-2M ident-no. U0323 or RSC-RKC572-2M ident-no. 6603629

**Pin Assignment**

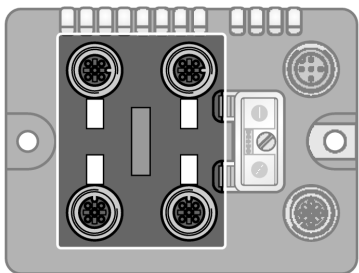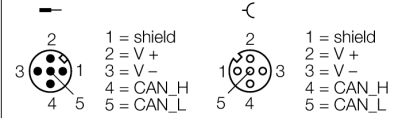


**Analog Inputs and Outputs**  
Extension cable (example): RK 4.5T-2-RS 4.5T/S653 ident-no. U2187-09 or RKC4.5T-2-RSC4.5T/TEL ident-no. 6625212


**Pin Assignment (Ports 0 to 1)**




**2-wire Technology (Current)**

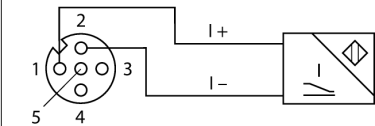


**2-wire Technology (Voltage)**

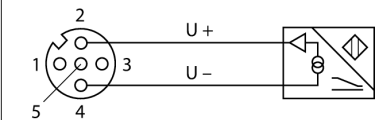


**3-wire Technology**

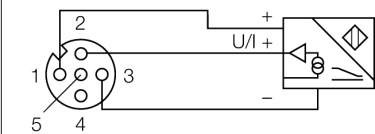

**4-wire Technology**

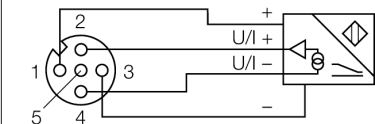

**Pin Assignment (Ports 2 to 3)**



**BL compact™ fieldbus station for DeviceNet™**
**2 Analog Inputs for Current or Voltage and 2 Analog Outputs for Voltage**
**BLCDN-4M12S-2AI2AO-VI**
**Station LED status**

LED	Color	Status	Description
IOs		OFF	No power
	RED	ON	Low power or station error
	RED	FLASHING (1 Hz)	I/O module configuration error
	RED	FLASHING (4 Hz)	No I/O module bus communication
	GREEN	ON	Station ok
	GREEN	FLASHING	Force mode active
MNS		OFF	No connection
	GREEN	ON	Connection established
	GREEN	FLASHING (1 Hz)	No connection established, device OK
	RED	ON	Duplicate MAC-ID
	RED	FLASHING	Connection time out
IO	GREEN	ON	I/O active
	GREEN	FLASHING (1 Hz)	One or more I/O in Idle State
	RED	ON	One or more I/O error
	RED	FLASHING	One or more I/O in Faulted State

**I/O LED status**

LED	Color	Status	Description
D *		OFF	No diagnostics active
	RED	ON	Station error/ module bus communication failure
	RED	FLASHING (0.5Hz)	Diagnostics active
AI channels 0...1		OFF	Channel inactive
	GREEN	ON	Channel active
	GREEN	FLASHING (0.5 Hz)	Underflow diagnostics
	GREEN	FLASHING (4 Hz)	Overflow diagnostics
AO channels 2...3			Not connected (The analog outputs do not have a LED)

\* D LED also indicates gateway diagnostics

**BL compact™ fieldbus station for DeviceNet™**

**2 Analog Inputs for Current or Voltage and 2 Analog Outputs for Voltage**

**BLCDN-4M12S-2AI2AO-VI**

**I/O & Diagnostic Data Map**

INPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
AI 1 <sub>0</sub>	0	AI 1 <sub>0</sub> LSB							
	1	AI 1 <sub>0</sub> MSB							
AI 1 <sub>1</sub>	2	AI 1 <sub>1</sub> LSB							
	3	AI 1 <sub>1</sub> MSB							
Diagnostics	4	Module number reporting diagnostic data							
	5	Replace Station	-	Diagnostics Active	-	-	-	-	-
Slot 1 (ref. Byte 4)	6	Hardware Failure	-	-	-	AI 1 <sub>0</sub> Overflow/Underflow	-	Wire Break AI 1 <sub>0</sub> (4...20 mA range only)	Range Error AI 1 <sub>0</sub>
	7	Hardware Failure	-	-	-	AO 1 <sub>2</sub> Overflow/Underflow	-	-	Range Error AO 1 <sub>2</sub>
	8	Hardware Failure	-	-	-	AI 1 <sub>1</sub> Overflow/Underflow	-	Wire Break AI 1 <sub>1</sub> (4...20 mA range only)	Range Error AI 1 <sub>1</sub>
	9	Hardware Failure	-	-	-	AO 1 <sub>3</sub> Overflow/Underflow	-	-	Range Error AO 1 <sub>3</sub>
OUTPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
AO 1 <sub>2</sub>	0	AO 1 <sub>2</sub> LSB							
	1	AO 1 <sub>2</sub> MSB							
AO 1 <sub>3</sub>	2	AO 1 <sub>3</sub> LSB							
	3	AO 1 <sub>3</sub> MSB							