



PAR-Max Plus™

NEXT GENERATION WATER PRESSURE PUMPS

Service up to five outlets with smooth flow and hassle-free operation.

The high pressure capability of the new Jabsco PAR-Max Plus Series water pressure pumps, available in 4.0, 5.0, and 6.0 GPM models, provides exceptional flow and consistent water pressure to easily handle the demand of multiple outlets. All PAR-Max Plus models include soft rubber mounts and quick connect fittings for ease of installation. The patented PAR-Max Plus co-injected molded diaphragm and larger heavier duty motor brushes significantly extend pump life up to 50% longer than existing Jabsco PAR-Max Series diaphragm pumps.

The PAR-Max Plus series is self-priming up to 10ft (3m) and can run dry without damage. It's manufactured from corrosion resistant materials, capable of handling the harshest marine environments. Available in both 12 or 24 volt DC versions, the PAR-Max Plus series water pressure pumps are certified to EN ISO 8846 Marine (Ignition Protection).

Features and Benefits

- Sealed switch and co-injected molded diaphragm, eliminates leak paths, extending the life of the pumps by up to 50%
- New 6.0 GPM product offering! Jabsco now offers a complete range of 1.0-7.0 GPM water pressure pumps
- Jabsco's robust electric diaphragm pump design, proven with over 7 million units in service
- Automatic pressure switch, tested over 4 millions cycles without failure
- Quick disconnect ports, allow for ease of installation in hard to reach places
- Improved noise dampening rubber feet, significantly minimize vibration when mounted against hard surfaces
- IPX6 rated



a xylem brand


PAR-Max Plus™ NEXT GENERATION WATER PRESSURE PUMPS



Specifications


Motor Design	Perm. Magnet TENV (non-ventilated)
Voltage Options	12V DC, 24V DC
Maximum Flow Rate	6.0 GPM (22.7 LPM)
Maximum Pressure	60 PSI (4.3 bar)
Duty Cycle	Intermittent
Weight	See table below
Certifications	CE, RoHs, IPX6
Standard Port Size Inlet/Outlet	1/2" Male Thread

Dimensional Drawing

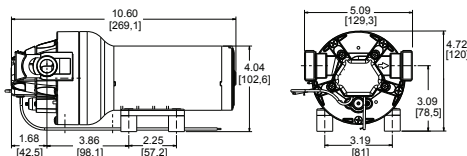

Note: 4 GPM model overall length 9.91 in. (251.7mm). All other dimensions are the same as the 5 GPM / 6 GPM models (shown above). Dimensions in inches [mm]

Typical Installation Layout

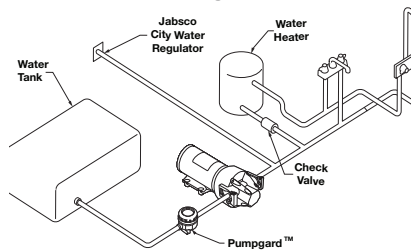

Accessories (not included)



Accumulator Tanks

Accumulator tanks hold a reservoir of air and water down stream from the pump. The air acts as a cushion, absorbing pump and pressure fluctuations, smoothing the flow and making the system quieter. Accumulators allow the pump to reach shut-off pressure more smoothly which reduces the on/off cycle which gives better control of hot water delivery.

Our accumulator tanks all have a bladder that separates water from air. The bladder is pre-pressurised but may need fine tuning when installed to give the most efficient performance. One of the advantages of an accumulator tank is that they can dispense up to half of their capacity of water even when the pump is switched off. So the bigger the reservoir, the more water you have available without having to switch the pump on helping you wash your hands or clean your teeth without noise.



Water Pressure Regulators

Inlet water regulators are designed to protect your boat water system plumbing and fixtures from the possible high pressure of municipal water systems. Regulation is controlled at all flow rates by a pre-set spring and removable strainer traps debris. Both inline portable and permanent flush mount models are available in our new line of diaphragm sealed regulators.



PumpGard™ Strainers

Inlet Strainers are an essential part of any fresh water system using a diaphragm pump - protecting the valves from small particles in the water. Our Pumpgards™ have been designed for easy installation and rapid filter screen cleaning having a transparent bowl that screws off to allow simple, regular inspection.

Part No.	Volts	GPM (LPM)	Switch PSI (Bar)	Fittings	UPC	Pack Count	Weight lbs (kg)
82600-0092	12	6.0 (22.7)	60 (4.3)	(2) 1/2" Male Thread (2) 1/2" Male Thread Elbow	6 71880 62356 8	4	9.0 (4.1)
82600-0094	24	6.0 (22.7)	60 (4.3)	(2) 1/2" Male Thread (2) 1/2" Male Thread Elbow	6 71880 62357 5	4	9.0 (4.1)
82500-0092	12	5.0 (18.9)	60 (4.3)	(2) 1/2" Male Thread (2) 1/2" Male Thread Elbow	6 71880 62358 2	4	9.0 (4.1)
82500-0094	24	5.0 (18.9)	60 (4.3)	(2) 1/2" Male Thread (2) 1/2" Male Thread Elbow	6 71880 62359 9	4	9.0 (4.1)
82400-0092	12	4.0 (15.1)	60 (4.3)	(2) 1/2" Male Thread (2) 1/2" Male Thread Elbow	6 71880 62360 5	4	8.0 (3.6)
82400-0094	24	4.0 (15.1)	60 (4.3)	(2) 1/2" Male Thread (2) 1/2" Male Thread Elbow	6 71880 62361 2	4	8.0 (3.6)
82600-0292	12	6.0 (22.7)	40 (2.8)	(2) 1/2" Male Thread (2) 1/2" Male Thread Elbow	6 71880 62362 9	4	9.0 (4.1)
82600-0294	24	6.0 (22.7)	40 (2.8)	(2) 1/2" Male Thread (2) 1/2" Male Thread Elbow	6 71880 62363 6	4	9.0 (4.1)
82500-0292	12	5.0 (18.9)	40 (2.8)	(2) 1/2" Male Thread (2) 1/2" Male Thread Elbow	6 71880 62364 3	4	9.0 (4.1)
82500-0294	24	5.0 (18.9)	40 (2.8)	(2) 1/2" Male Thread (2) 1/2" Male Thread Elbow	6 71880 62365 0	4	9.0 (4.1)
82400-0292	12	4.0 (15.1)	40 (2.8)	(2) 1/2" Male Thread (2) 1/2" Male Thread Elbow	6 71880 62366 7	4	8.0 (3.6)
82400-0294	24	4.0 (15.1)	40 (2.8)	(2) 1/2" Male Thread (2) 1/2" Male Thread Elbow	6 71880 62367 4	4	8.0 (3.6)
82600-0392	12	6 (22.7)	25 (1.7)	(2) 1/2" Male Thread (2) 1/2" Male Thread Elbow	6 71880 62378 0	4	9.0 (4.1)
82600-0394	24	6 (22.7)	25 (1.7)	(2) 1/2" Male Thread (2) 1/2" Male Thread Elbow	6 71880 62379 7	4	9.0 (4.1)
82500-0392	12	5 (18.9)	25 (1.7)	(2) 1/2" Male Thread (2) 1/2" Male Thread Elbow	6 71880 62380 3	4	9.0 (4.1)
82500-0394	24	5 (18.9)	25 (1.7)	(2) 1/2" Male Thread (2) 1/2" Male Thread Elbow	6 71880 62381 0	4	9.0 (4.1)
82400-0392	12	4 (15.1)	25 (1.7)	(2) 1/2" Male Thread (2) 1/2" Male Thread Elbow	6 71880 62382 7	4	8.0 (3.6)
82400-0394	24	4 (15.1)	25 (1.7)	(2) 1/2" Male Thread (2) 1/2" Male Thread Elbow	6 71880 62383 4	4	8.0 (3.6)



Warranty: All products of the company are sold and all services of the company are offered subject to the company's warranty and terms and conditions of sale, copies of which will be furnished upon request. The information provided herein is for guidance only, it does not constitute a guarantee of the performance or specification of any individual product or component.

www.xylem.com

USA
Xylem, Inc.
17942 Cowan
Irvine, CA 92614
Tel: (949) 608-3900
Fax: (949) 609-3887

UK
Xylem, Inc.
Bingley Road, Hoddesdon
Hertfordshire EN11 0BU
Tel: +44 (0) 1992 450145
Fax: +44 (0) 1992 467132

GERMANY
Xylem, Inc.
Oststrasse 28
22844 Norderstedt
Tel: +49-40-53 53 73-0
Fax: +49-40-53 53 73-11

CHINA
Xylem, Inc.
30/F, Tower A Hongqiao City
Center of Shanghai 100 Zunyi
Road, Shanghai 200051, China
Tel: +(86) 21 2208 2888
Fax: +(86) 21 2208 2999

ITALY
Xylem, Inc.
Via Tommaseo, 6
20059 Vimercate, Milano
Tel: +39 039 685 2323
Fax: +39 039 666 307